

Model Mechanical Series_152




Main Characteristics

Mostly Use: high corrosion mediums of different concentrations, such as sulfuric acid, hydrochloric acid, phosphoric acid, acetic acid, nitric acid, etc.


Temperature in the sealed chamber: $\leq 120^{\circ}\text{C}$

Pressure in the sealed chamber: $\leq 0.5\text{Mpa}$

Linear Velocity: $\leq 15\text{m/Sec}$

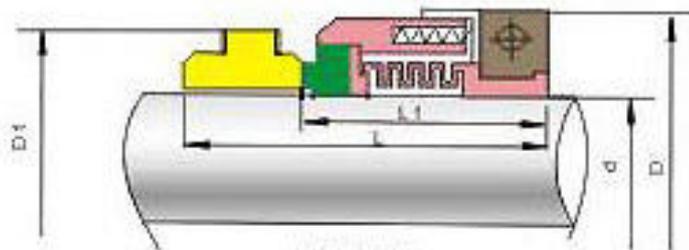

HSWB2

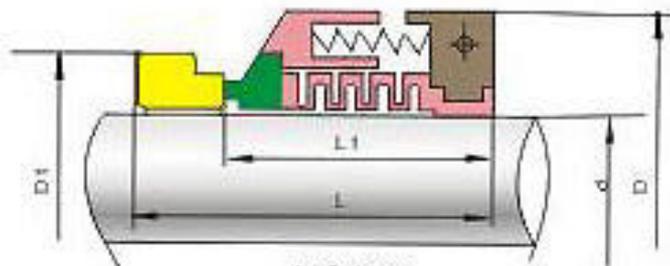

HS152

Stationary ring pad(PTEE)
 Stationary ring(Ceramic/Silicon Carbon)
 Bellow(PTEE)
 Spring holder(PTEE)
 Spring(Stainless Steel)
 Spring protection sheath(PTEE)
 Socket Head Cap Screw(Stainless Steel)
 Half Clamp Ring(Stainless Steel)

尺寸 Size 规格 Spe	d	D	D1	L	L1
HS152-25	25	65	48	53	41
HS152-30	30	67	53	53	41
HS152-35	35	73	58	54	42
HS152-40	40	78	63	54	42
HS152-45	45	89	68	62.5	48
HS152-50	50	94	73	62.5	48
HS152-55	55	96	78	62.5	48
HS152-60	60	101	87	66.5	52.5
HS152-65	65	106	92	66.5	52.5

尺寸 Size 规格 Spe	d	D	D1	L	L1
HSWB2-30	30	67	65	68	41
HSWB2-35	35	73	70	68	42
HSWB2-40	40	78	76	68	42
HSWB2-45	45	86	80	75	48
HSWB2-50	50	91	85	75	48
HSWB2-55	55	96	90	75	48
HSWB2-60	60	101	95	66.5	52.5
HSWB2-65	65	106	100	66.5	52.5

