



Model Mechanical Series_B




Main Characteristics

Mostly Use: Pump of cooled, in-line pump, oil and other low

Temperature in the sealed chamber: $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$

Pressure in the sealed chamber: $\leq 0.3\text{Mpa}$

Linear Velocity: $\leq 10\text{m/Sec}$

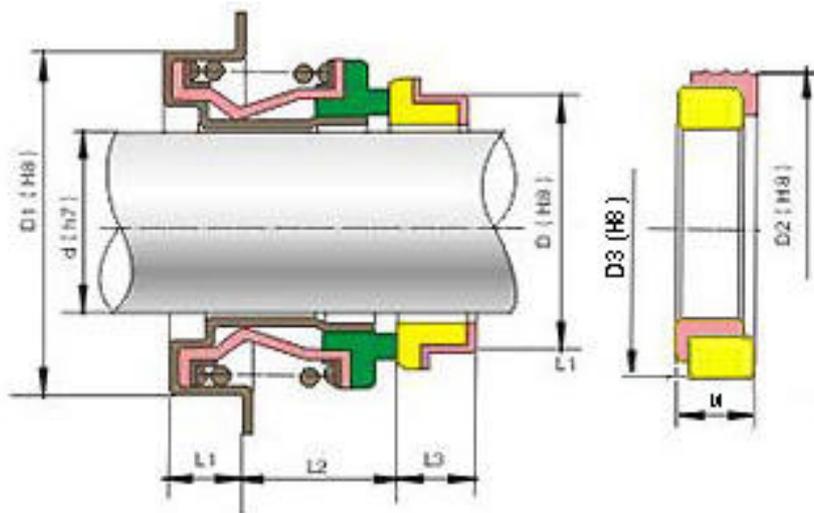

Stationary Ring(Carbon/SiC/TC)
 Rotary Ring(Ceramic/SiC/TC)
 Secondary Seal(NBR/EPDM/VITON)
 Spring & Other Parts(Copper/SUS304/SUS316)

尺寸 Size 规格 Spe	d	D	D1	D2	D3	L1	L2	L3	L4
HSB-12	12	18	26			8	6	6.8	
HSB-12A	12		30	24	24	9.5	5.5	4.5	5
HSB-13	13		30	25	24	8.5	5.2	5	5
HSB-15	15	21.5	30		29	9	7	6.8	5
HSB-17	17	25	35	30	29	9	10.5	7.5	5
HSB-20	20		40	35/36	34	9.5	12	7	6
HSB-25	25		50	41.5		12	10	8	
HSB-28	28		52	45		10	9.5	7.5	
HSB-30	30		52	48		10	9.5	8.2	
HSB-35	35		58	50		10	12	8.2	