

Model Mechanical Series_1527




Main Characteristics

Mostly Use: average corrosion mediums, such as water, oils, weak acid, weak alkali etc.

Temperature in the sealed chamber: $-30^{\circ}\text{C} \sim 200^{\circ}\text{C}$

Pressure in the sealed chamber: $\leq 1.0\text{Mpa}$

Linear Velocity: $\leq 16\text{m/Sec}$

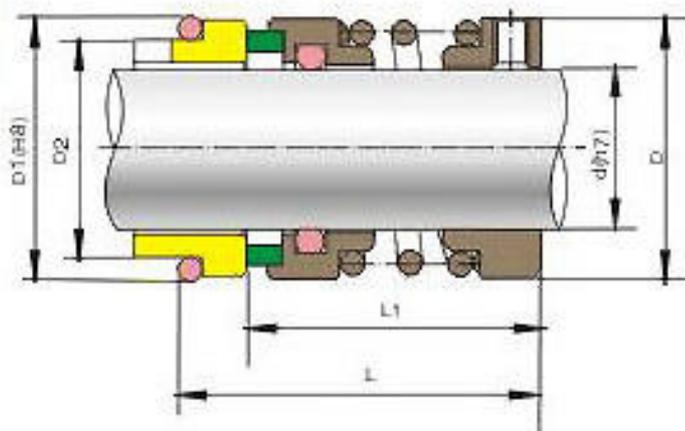

Stationary Ring(Ceramic/SiC/TC)
 Rotary Ring(Carbon/SiC/TC)
 Secondary Seal(NBR/EPDM/VITON)
 Spring(SUS304/SUS316)
 Retainer(SUS304/SUS316)

尺寸 Size 规格 Spe	d	D	D1	D2	L	L1
HS1527-20	20	34	35	29	45	35
HS1527-25	25	39	40	34	50	40
HS1527-28	28	42	43	37	50	40
HS1527-30	30	44	45	39	50	40
HS1527-32	32	46	48	42	55	45
HS1527-35	35	49	50	44	55	45
HS1527-38	38	54	56	49	55	44
HS1527-40	40	56	58	51	55	44
HS1527-45	45	61	63	56	60	49
HS1527-50	50	66	70	62	60	47
HS1527-55	55	71	75	67	70	57
HS1527-60	60	80	80	72	70	57
HS1527-65	65	85	85	77	80	67
HS1527-70	70	90	92	83	80	64.7
HS1527-75	75	99	97	88	80	64.7
HS1527-80	80	104	105	95	95	74.3
HS1527-85	85	109	110	100	90	74.3
HS1527-90	90	114	115	105	90	74.3
HS1527-95	95	119	120	110	90	74.3
HS1527-100	100	124	125	115	90	74.3