

## Model Mechanical Series\_BIA




### Main Characteristics

Mostly Use: water, oil and other low corrosion liquids.

Temperature in the sealed chamber:  $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$

Pressure in the sealed chamber:  $\leq 1.0\text{Mpa}$

Linear Velocity:  $\leq 15\text{m/Sec}$

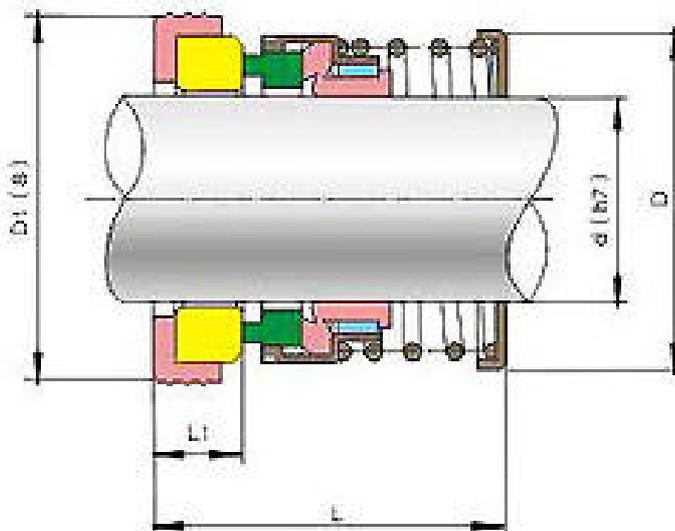

Stationary Ring(Ceramic/SIC/TC)  
 Rotary Ring(Carbon/SIC/TC)  
 Secondary Seal(NBR/EPDM/VITON)  
 Spring & Other Parts(SUS304/SUS316)

尺寸 Size 规格 Spe	d	D	D1	L	L1
HSBIA-14	14	26.5	30	24	5
HSBIA-16	16	28	32	26	5
HSBIA-18	18	29.5	35	30	7.5
HSBIA-20	20	31.6	35	29	8
HSBIA-25	25	40	40	33.5	8
HSBIA-28	28	42.5	43	33.5	8
HSBIA-30	30	45	45	34.5	9
HSBIA-32	32	47.5	48	42.5	9
HSBIA-33	33	47.5	48	42.5	9
HSBIA-35	35	50	50	42.5	9
HSBIA-38	38	54.5	56	42.5	9
HSBIA-40	40	57	58	42.5	9
HSBIA-43	43	60.5	61	46	9.5
HSBIA-45	45	63	63	47.5	9.5
HSBIA-48	48	64	66	47.5	9.5
HSBIA-50	50	67.8	70	47.5	9.5
HSBIA-53	53	71	73	50.5	9.5
HSBIA-55	55	74	75	50.5	9.5
HSBIA-58	58	80	78	51.5	9.5
HSBIA-60	60	82.5	80	51.5	9.5
HSBIA-65	65	85	85	52	10
HSBIA-70	70	92	92	56	11
HSBIA-80	80	105	104	67	12
HSBIA-85	85	110	109	76	12
HSBIA-90	90	115	111	78	12



