



Model Mechanical Series_HS 20/24




Main Characteristics

Mostly Use: water, oil and other low corrosion liquids.

Temperature in the sealed chamber: $-20^{\circ}\text{C} \sim 110^{\circ}\text{C}$

Pressure in the sealed chamber: $\leq 0.5\text{Mpa}$

Linear Velocity: $\leq 6\text{m/Sec}$

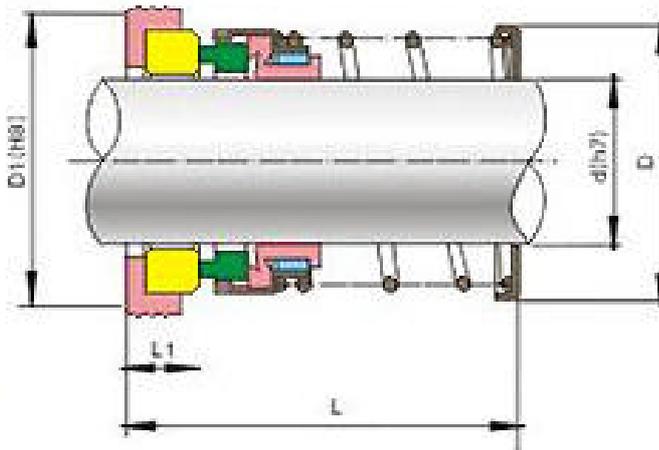

Stationary Ring(Ceramic/SiC/TC)
 Rotary Ring(Carbon/SiC/TC)
 Secondary Seal(NBR/EPDM/VITON)
 Spring & Other Parts(SUS304/SUS316)

尺寸 Size 规格 Spe	d	D	D1	L	L1
HS24-12	12	22	23	32.5	8.6
HS24-14	14	24	25	35	8.6
HS24-16	16	27	27	35	8.6
HS24-18	18	30.5	33	37.5	10
HS24-20	20	33.5	35	37.5	10
HS24-22	22	33.5	37	37.5	10
HS24-24	24	38.3	39	40	10
HS24-25	25	39.5	40	40	10
HS24-28	28	42.3	43	42.5	10
HS24-30	30	44	45	42.5	10
HS24-32	32	46	48	42.5	10
HS24-33	33	46	48	42.5	10
HS24-35	35	49.3	50	42.5	10
HS24-38	38	53	56	45	11
HS24-40	40	56	58	45	11
HS24-43	43	59	61	45	11
HS24-45	45	61.3	63	45	11
HS24-48	48	64.3	66	45	11
HS24-50	50	66.3	70	47.5	13
HS24-55	55	72	75	47.5	13
HS24-58	58	78.5	78	52.5	13
HS24-60	60	78.5	80	52.5	13
HS24-63	63	81.8	83	52.5	13
HS24-65	65	84.5	85	52.5	13
HS24-68	68	90	90	52.5	15.3
HS24-70	70	90	92	52.5	15.3
HS24-75	75	97	97	60	15.3

