



Model Mechanical Series_HS 156




Main Characteristics

Mostly Use: water, oil and other low corrosion liquids.

Temperature in the sealed chamber: $-20^{\circ}\text{C} \sim 110^{\circ}\text{C}$

Pressure in the sealed chamber: $\leq 0.5\text{Mpa}$

Linear Velocity: $\leq 6\text{m/Sec}$

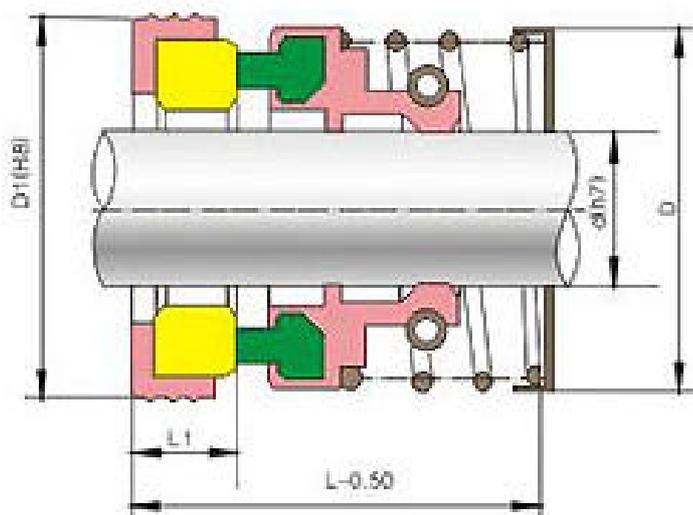

Stationary Ring(Ceramic/SiC/TC)
 Rotary Ring(Carbon/SiC/TC)
 Secondary Seal(NBR/EPDM/VITON)
 Spring & Other Parts(SUS304/SUS316)

尺寸 Size 规格 Spe	d	D	D1	L	L1
HS156-8	8	16	18	18.3	9
HS156-9	9	19	21	23.3	9
HS156-10	10	21	20	23.3	9
HS156-11	11	21	24	23.3	9
HS156-12	12	23	26	24.3	9
HS156-13	13	23	26	24.3	9
HS156-14	14	24.5	28	25.3	9
HS156-15	15	24.5	28	25.3	9
HS156-16	16	28.5	32	27.3	10
HS156-17	17	28.5	32	27.3	10
HS156-18	18	31.5	35	29.3	10
HS156-19	19	31.5	35	29.3	10
HS156-20	20	33.5	38	31.3	10
HS156-22	22	34.5	40	32.3	10
HS156-25	25	37.5	44	33.3	11
HS156-28	28	40.5	46	34.3	11
HS156-30	30	44.5	50	35.3	11
HS156-32	32	47.5	54	37.3	11
HS156-35	35	50.5	58	40.3	12
HS156-38	38	53.5	60	42.3	12
HS156-40	40	56.5	64	43.3	12
HS156-45	45	61.5	66	45.3	12
HS156-50	50	66.5	72	47.3	12