

(TB) Double lip spring loaded ground metal_HS 155




Main Characteristics

Mostly Use: water, oil and other low corrosion liquids.

Temperature in the sealed chamber: $-20^{\circ}\text{C} \sim 100^{\circ}\text{C}$

Pressure in the sealed chamber: $\leq 0.8\text{Mpa}$

Linear Velocity: $\leq 15\text{m/Sec}$

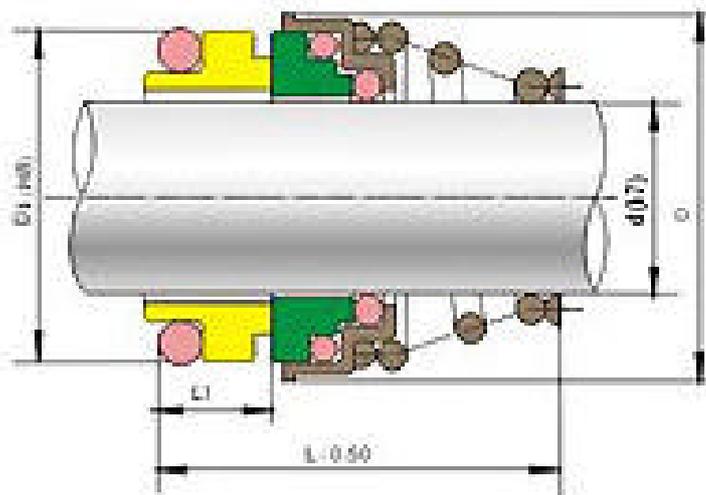

Stationary Ring(Carbon/SIC/TC)
 Rotary Ring(Ceramic/SIC/TC)
 Secondary Seal(NBR/EPDM/VITON)
 Spring & Other Parts(SUS304/SUS316)
 Model Mechanical Series

型号 Model	d	D	D1	L	L1
HS155-10	10	20	18.1	20.8	5.5
HS155-11	11	22	20.6	23.8	5.5
HS155-12	12	22	20.6	23.8	5.5
HS155-13	13	25	23.1	28.3	6
HS155-14	14	25	23.1	28.3	6
HS155-15	15	29	26.9	29.3	7
HS155-16	16	29	26.9	30.3	7
HS155-17	17	29	26.9	30.3	7
HS155-18	18	33	30.9	32.3	8
HS155-19	19	33	30.9	33.3	8
HS155-20	20	33	30.9	33.3	8
HS155-21	21	38	35.4	33.3	8
HS155-22	22	38	35.4	33.3	8
HS155-23	23	38	35.4	35.3	8
HS155-24	24	38	35.4	35.3	8
HS155-25	25	40	38.2	35.8	8.5
HS155-28	28	46	43.3	38.3	9
HS155-29	29	46	43.3	39.3	9
HS155-30	30	46	43.3	39.3	9
HS155-32	32	46	43.3	39.3	9
HS155-33	33	48	53.5	50.8	11.5
HS155-35	35	50	53.5	50.8	11.5
HS155-38	38	56	60.5	50.8	11.5
HS155-40	40	58	60.5	50.8	11.5

