



Model Mechanical Series_HS 208




Main Characteristics

Major for submersible pumps and sewage pumps etc.

Temperature in the sealed chamber: $-20^{\circ}\text{C} \sim 110^{\circ}\text{C}$

Pressure in the sealed chamber: $\leq 0.6\text{Mpa}$

Linear Velocity: $\leq 6\text{m/Sec}$

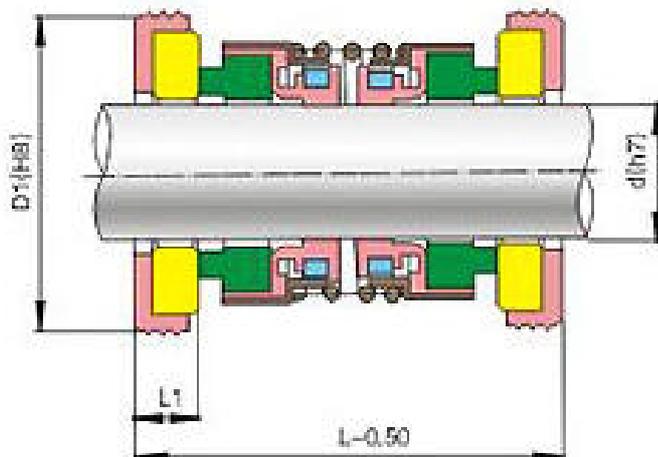

Stationary Ring(Ceramic/SiC/TC)
 Rotary Ring(Carbon/SiC/TC)
 Secondary Seal(NBR/EPDM/VITON)
 Spring & Other Parts(SUS304/SUS316)

尺寸 Size 规格 Spe	d	D1	L	L1
HS208-10	10	21	30.3	5
HS208-12	12	26	30.3	5
HS208-14	14	26	38.3	5
HS208-16	16	27	38.3	5
HS208-18	18	33	38.3	5
HS208-20	20	35	40.3	5
HS108-25	25	40	48.3	7
HS108-30	30	45	51.3	7
HS108-35	35	50	51.3	8

