



Model Mechanical Series_210




Main Characteristics

Temperature in the sealed chamber: $-40^{\circ}\text{C} \sim 200^{\circ}\text{C}$

Pressure in the sealed chamber: $\leq 1.8\text{Mpa}$

Linear Velocity: $\leq 13\text{m/Sec}$

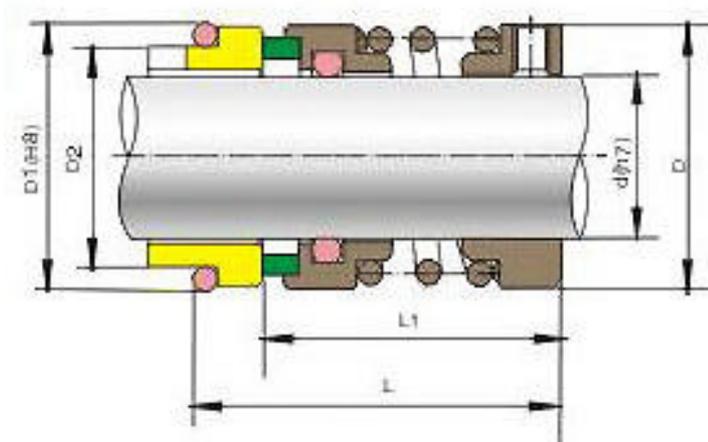

Stationary Ring(Ceramic/SIC/TC)
 Rotary Ring(Carbon/SIC/TC)
 Secondary Seal(NBR/EPDM/VITON)
 Spring & Other Parts(SUS304/SUS316)

尺寸 Size 规格 Spe	d	D	D1	L1	L2	L3	L4
HS210-10	10	20	21	5	15	27.5	35.0
HS210-12	12	22	23	6	15	26.5	34.0
HS210-14	14	24	25	6	15	29.0	34.0
HS210-15	15	25	26	6	15	29.0	34.0
HS210-16	16	26	27	6	15	29.0	34.0
HS210-18	18	32	33	6	20	31.5	39.0
HS210-20	20	34	35	6	20	31.5	39.0
HS210-22	22	36	37	6	20	31.5	39.0
HS210-24	24	38	39	6	20	34.0	44.0
HS210-25	25	39	40	6	20	34.0	44.0
HS210-28	28	42	43	6	26	36.5	44.0
HS210-30	30	44	45	7	26	35.5	43.0
HS210-32	32	46	48	7	26	35.5	48.0
HS210-33	33	47	48	7	26	35.5	48.0
HS210-35	35	49	50	8	26	34.5	47.0
HS210-38	38	54	56	8	30	37.0	47.0
HS210-40	40	56	58	8	30	37.0	47.0
HS210-43	43	59	61	8	30	37.0	52.0
HS210-45	45	61	63	8	30	37.0	52.0
HS210-48	48	64	66	10	30	35.0	50.0
HS210-50	50	66	70	10	30	37.5	50.0
HS210-53	53	69	73	10	30	37.5	60.0
HS210-55	55	71	75	10	30	37.5	60.0
HS210-58	58	78	78	10	33	42.5	60.0
HS210-60	60	80	80	12	33	40.5	58.0
HS210-63	63	83	83	12	33	40.5	58.0
HS210-65	65	85	85	12	33	40.5	68.0
HS210-68	68	88	90	12	33	40.5	68.0
HS210-70	70	90	92	12	33	48.0	68.0
HS210-75	75	99	97	12	40	48.0	68.0
HS210-80	80	104	105	14	40	47.5	77.5
HS210-85	85	109	110	14	40	47.5	77.5
HS210-90	90	114	115	14	40	52.5	77.5
HS210-95	95	119	120	14	40	52.5	77.5
HS210-100	100	124	125	14	40	52.5	77.5

