



Model Mechanical Series_C




Main Characteristics

Mostly Use: Pump of cooled, oil and other low corrosion

Temperature in the sealed chamber: $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$

Pressure in the sealed chamber: $\leq 0.3\text{Mpa}$

Linear Velocity: $\leq 10\text{m/Sec}$

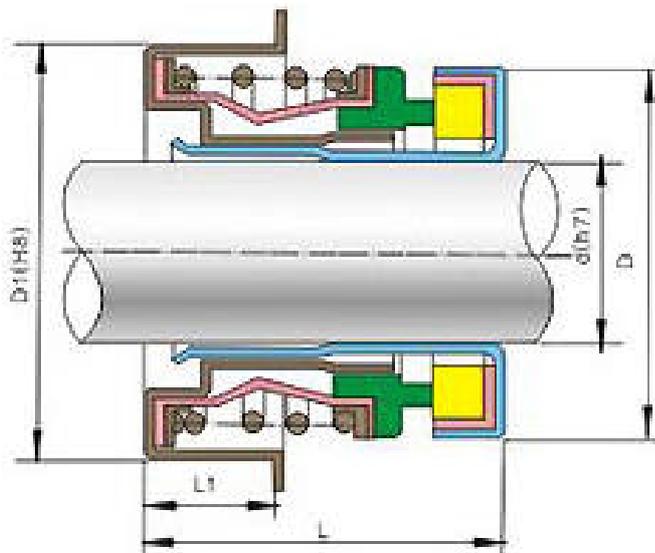

Stationary Ring(Carbon/SIC)
 Rotary Ring(Ceramic/SIC/TC)
 Secondary Seal(NBR/EPDM/VITON)
 Spring & Other Parts(Copper/SUS304/SUS316)

尺寸 Size 规格 Spe	d1	D	D1	L	L1
HSC-10	10	23.5	30	13.7	8.5
HSC-12	12	25	30	17.7	8
HSC-12A	12	25	33.3	17.7	6
HSC-12B	12	25	28.55	17.7	8
HSC-12C	12	28.5	30	14.7	7
HSC-1/2	12.7	28.5	30	14.7	7
HSC-13	13	25	30	18.2	8.5
HSC-15	15	32.5	36.45	19.4	8.2
HSC-5/8	15.875	30	34.2	17.85	5.6
HSC-5/8A	15.875	30	36.45	19.2	8
HSC-5/8B	15.875	30	38.1	19.2	8
HSC-16	16	32.5	36.45	19.4	8.2
HSC-16A	16	32.5	38.1	19.7	8.2
HSC-17	17	29.5	35	22.5	9
HSC-20A	20	37	38/40	22	9.5
HSC-20B	20	37	52	28.5	9.5

