

Model Mechanical Series_HS 104




Main Characteristics

Mostly Use: Pump of cooled, oil and other low corrosion Mediums.

Temperature in the sealed chamber: $-20^{\circ}\text{C} \sim 120^{\circ}\text{C}$

Pressure in the sealed chamber: $\leq 0.3\text{Mpa}$

Linear Velocity: $\leq 10\text{m/Sec}$

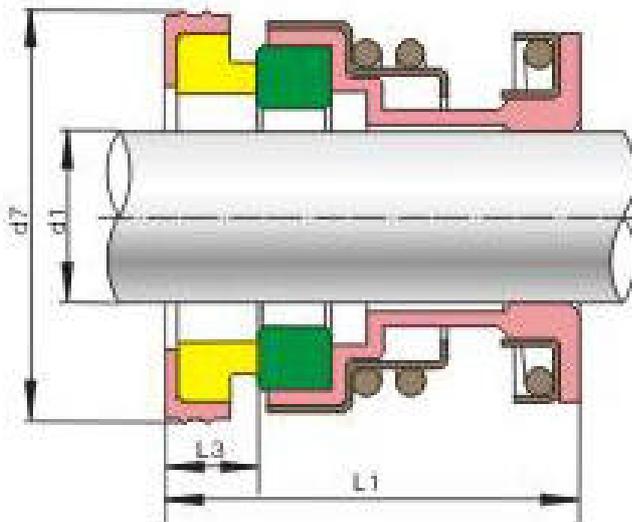

Stationary Ring(Ceramic/SiC/TC)
 Rotary Ring(Carbon/SiC/TC)
 Secondary Seal(NBR/EPDM/VITON)
 Spring & Other Parts(Copper/SUS304/SUS316)

尺寸 Size 规格 Spe	d1	d7	L1	L3
HS104-9	9	22	20	5.5
HS104-10	10	22	20	5.5
HS104-11	11	24	20	5.5
HS104-12	12	24	20	5.5
HS104-14	14	26	25	7
HS104-15	15	28	25	7
HS104-16	16	28	25	7
HS104-17	17	34	25	7
HS104-18	18	34	25	7
HS104-19	19	36	25	7
HS104-20	20	36	25	7
HS104-22	22	38	25	7
HS104-25	25	41	37	9
HS104-30	30	46	37	9
HS104-35	35	51	37	9
HS104-40	40	60	40	10.5
HS104-45	45	65	40	10.5

