



## Model Mechanical Series\_HS 59U




### Main Characteristics

Mostly Use: petroleum products, chemical solvents, low and  
Temperature in the sealed chamber:  $-40^{\circ}\text{C} \sim 200^{\circ}\text{C}$

Pressure in the sealed chamber:  $\leq 1.2\text{Mpa}$

Linear Velocity:  $\leq 20\text{m/Sec}$

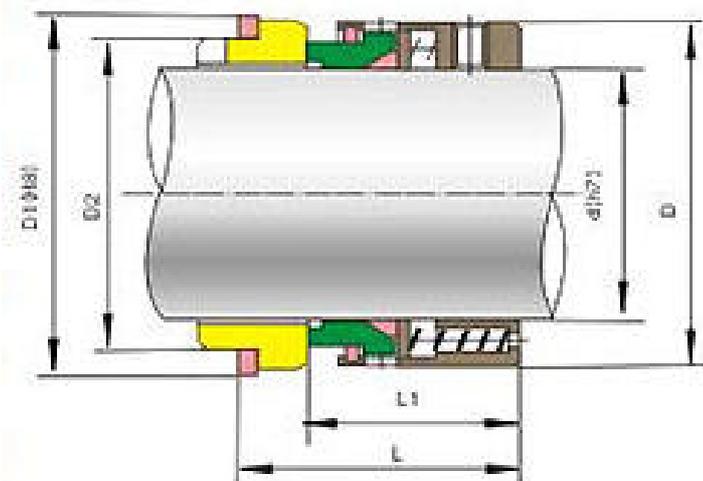

Stationary Ring(Ceramic/SiC/TC)  
 Rotary Ring(Carbon/SiC/TC)  
 Secondary Seal(NBR/EPDM/VITON)  
 Spring(SUS304/SUS316)  
 Retainer(SUS304/SUS316)

尺寸 Size 规格 Spe	d	D	D1	D2	L	L1
HS59U-14	14	24.3	25	21	35.0	23.0
HS59U-16	16	26.3	27	23	35.0	23.0
HS59U-18	18	32.3	33	27	37.5	24.0
HS59U-20	20	34.3	35	29	37.5	24.0
HS59U-22	22	36.3	37	31	37.5	24.0
HS59U-24	24	38.3	39	33	40.0	26.7
HS59U-25	25	39.3	40	34	40.0	27.0
HS59U-28	28	42.3	43	37	42.5	30.0
HS59U-30	30	44.3	45	39	42.5	30.5
HS59U-32	32	46.3	48	42	42.5	30.5
HS59U-33	33	47.3	48	42	42.5	30.5
HS59U-35	35	49.3	50	44	42.5	30.5
HS59U-38	38	54.3	56	49	45.0	32.0
HS59U-40	40	56.3	58	51	45.0	32.0
HS59U-43	43	59.3	61	54	45.0	32.0
HS59U-45	45	61.3	63	56	45.0	32.0
HS59U-48	48	64.3	66	59	45.0	32.0
HS59U-50	50	66.3	70	62	47.5	34.0
HS59U-53	53	69.3	73	65	47.5	34.0
HS59U-55	55	71.3	75	67	47.5	34.0
HS59U-58	58	78.3	78	70	52.5	39.0
HS59U-60	60	80.3	80	72	52.5	39.0
HS59U-63	63	83.3	83	75	52.5	39.0
HS59U-65	65	85.3	85	77	52.5	39.0
HS59U-68	68	88.3	90	81	52.5	39.0
HS59U-70	70	90.3	92	83	60.0	45.5
HS59U-75	75	95.3	97	88	60.0	45.5
HS59U-80	80	104.3	105	95	60.0	45.0
HS59U-85	85	109.3	110	100	60.0	45.0
HS59U-90	90	114.3	115	105	65.0	50.0
HS59U-95	95	119.3	120	110	65.0	50.0
HS59U-100	100	124.3	125	115	65.0	50.0



