



## Model Mechanical Series\_HS 560A




### Main Characteristics

Major for suction pumps and agitator pumps etc.

Temperature in the sealed chamber:  $-20^{\circ}\text{C} \sim 110^{\circ}\text{C}$

Pressure in the sealed chamber:  $\leq 0.8\text{Mpa}$

Linear Velocity:  $\leq 5\text{m/Sec}$

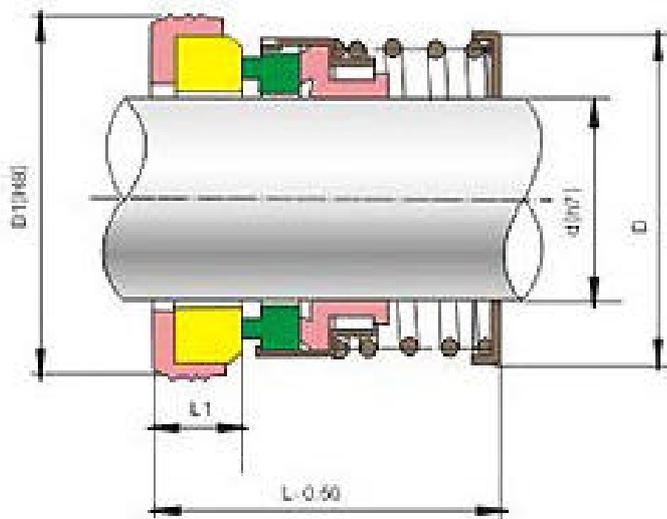

Stationary Ring(Ceramic/SIC/TC)  
 Rotary Ring(Carbon/SIC/TC)  
 Secondary Seal(NBR/EPDM/VITON)  
 Spring & Other Parts(SUS304/SUS316)

尺寸 Size 规格 Spe	d	D	D1	L	L1
HS560A-8	8	18.2	21	18.3	7
HS560A-9	9	18.2	24	23.3	7
HS560A-10	10	20.6	24	23.3	7
HS560A-11	11	20.6	24	23.3	7
HS560A-12	12	21.8	26	24.3	7
HS560A-13	13	21.8	26	24.3	7
HS560A-14	14	26.4	28	25.3	7
HS560A-15	15	26.4	28	25.3	7
HS560A-16	16	26.4	32	27.3	8
HS560A-17	17	29.5	32	27.3	8
HS560A-18	18	29.5	35	26.3	8
HS560A-19	19	29.5	35	26.3	8
HS560A-20	20	31.6	38	28.3	8
HS560A-22	22	33.6	40	28.3	8
HS560A-25	25	39.6	44	29.3	9
HS560A-28	28	45	46	30.3	9
HS560A-30	30	46.6	50	31.3	9
HS560A-32	32	46.6	54	33.3	9
HS560A-35	35	50.8	58	36.3	10
HS560A-38	38	54.3	60	37.3	10
HS560A-40	40	57.3	64	38.3	10
HS560A-45	45	61.3	66	40.3	10
HS560A-50	50	67.8	72	42.3	10



