


HTD5M Type synchronous pulley
specification model size table

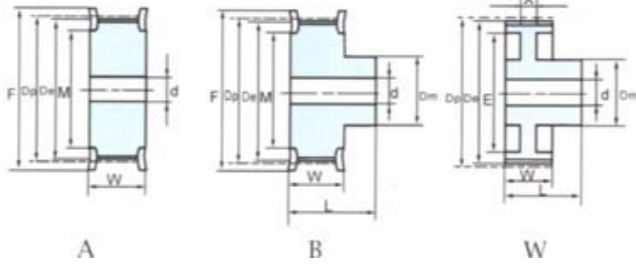

The table of common differences for the
external diameters

Pitch=5.0

Standard belt width	9mm	15mm	20mm	25mm	30mm	40MM	The external diameters	The common differences
L	22	28	35	40	45	55	<25.4	0.05
W	14	20	25	30	35	45	25.4-50.8	0.08
X	5	6	7	8	9	10	50.8-101.6	0.1
							177.8	0.13
							304.8	0.15

Tooth number may be wantonly chosen.Special model would be provided with drawings by consumers.if

SPCFCTN	TYPE	Z	DP	DE	DM	D	E	F	M	F
14-5M	A.B	14	22.28	21.14	12	6		25	14	F-102514
15-5M	A.B	15	23.87	22.73	13	6		28	18	F-102818
16-5M	A.B	16	25.46	24.32	15	6		31	20	F-103120
18-5M	A.B	18	28.65	27.5	18	6		33	22	F-103322
19-5M	A.B	19	30.24	29.1	19	6		35	22	F-103522
20-5M	A.B	20	31.83	30.69	20	8		35	22	F-103522
21-5M	A.B	21	33.42	32.28	22	8		38	26	F-103826
22-5M	A.B	22	35.01	33.87	22	8		38	26	F-103826
24-5M	A.B	24	38.2	37.05	26	8		43	28	F-104328
25-5M	A.B	25	39.79	38.65	28	8		44	32	F-104432
26-5M	A.B	26	41.38	40.24	28	10		47	34	F-104734
28-5M	A.B	28	44.56	43.42	30	10		48	36	F-104836
30-5M	A.B	30	47.75	46.6	32	10		51	36	F-105136
32-5M	A.B	32	50.93	49.79	34	10		55	39	F-105539
34-5M	A.B	34	54.11	52.97	36	12		57	41	F-105741
36-5M	A.B	36	57.3	56.15	38	12		61	49	F-106149
38-5M	A.B	38	60.48	59.34	38	12		65	50	F-106550
40-5M	A.B	40	63.66	62.52	40	12		69	50	F-106950
42-5M	A.B	42	66.85	65.7	42	12		69	50	F-106950
46-5M	A.B	46	73.21	72.07	44	12		78	58	F-107858
48-5M	A.B	48	76.69	75.25	46	12		83	68	F-108368
50-5M	A.B	50	79.58	78.43	46	12	58	83	71	F-108371
54-5M	A.B	54	85.94	84.8	48	12	64	90	77	F-109077
56-5M	A.B	56	89.13	87.98	50	12	68	93	81	F-109381
58-5M	A.B	58	92.31	91.17	50	12	71	96	84	F-109684
60-5M	W	60	95.48	94.35	52	12	74	99	87	F-109987
72-5M	W	72	114.59	113.45	56	16	93	118	106	F-1018106