


HTD8M Type synchronous pulley

specification model size table

pitch=8.0 OD tolerance

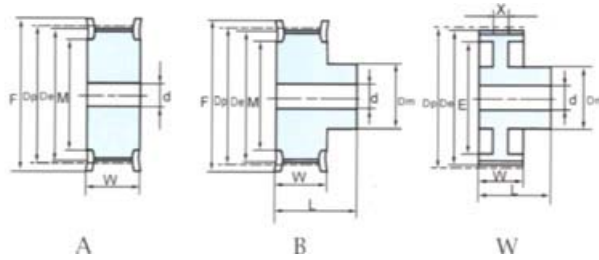

Standard belt width	20.0mm	25.0mm	30.0mm	40mm	50mm	60MM	70mm	85mm	The external diameters	The common differences
L	48	53	58	68	79	89	99	115	<25.4	0.05
W	28	33	38	48	59	69	79	95	25.4-50.8	0.08
X	8	9	9	11	12	13	14	15	50.8-101.6	0.1
									101.6-177.8	0.13
									177.8-304.8	0.15

Tooth number may be wantonly chosen.Special model would be provided with drawings by consumers.if

SPCFCTN	TYPE	Z	DP	DE	DM	D	E	F	M	F
22-8M	A.B	22	56.02	54.65	40	16		64	45	F-156445
24-8M	A.B	24	61.12	59.74	44	16		69	50	F-156950
25-8M	A.B	25	63.66	62.29	46	16		69	50	F-156950
26-8M	A.B	26	66.21	64.84	48	16		74	53	F-157453
28-8M	A.B	28	71.3	69.93	52	16		78	58	F-157858
30-8M	A.B	30	76.39	75.02	56	16		83	63	F-158363
32-8M	A.B	32	81.49	80.12	60	20		90	69	F-159069
34-8M	A.B	34	86.58	85.21	64	20		93	75	F-159375
36-8M	A.B	36	91.67	90.3	68	20		99	78	F-159978
38-8M	A.B	38	96.77	95.39	72	20		105	84	F-1510584
40-8M	A.B	40	101.86	100.49	74	20		112	90	F-1511290
42-8M	A.B	42	106.95	105.58	76	20		116	94	F-2011694
44-8M	A.B	44	112.05	110.67	78	20		121	99	F-2012199
46-8M	A.B	46	117.14	115.77	80	20		126	104	F-20126104
48-8M	A.B	48	122.23	120.83	80	20		131	109	F-20131109
50-8M	W	50	127.32	125.95	82	20	94	136	114	F-20136114
52-8M	W	52	132.43	131.04	84	20	99	141	119	F-20141119
56-8M	W	56	142.6	141.23	86	20	110	152	134	F-20156134
58-8M	W	58	147.7	146.32	88	20	115	156	135	F-20156135
60-8M	W	60	152.79	151.42	88	30	120	161	140	F-20161140
62-8M	W	62	157.88	156.51	90	30	125	166	145	F-20166145
64-8M	W	64	162.97	161.6	92	30	130	172	150	F-20172150
67-8M	W	67	170.61	169.24	94	30	138	179	158	F-20179158
72-8M	W	72	183.35	181.97	94	30	151	192	171	F-20192171
80-8M	W	80	203.72	202.35	98	30	171	212	191	F-20212191
84-8M	W	84	213.9	212.53	98	30	181	223	201	F-20223201
90-8M	W	90	229.18	227.81	100	30	196	238	216	F-20238216
96-8M	W	96	244.46	243.09	102	30	211	253	231	F-20253231
112-8M	W	112	285.21	283.83	108	40	252	294	272	F-20294272