


HTD3M Type synchronous pulley
specification model size table

Pitch=3.0

differences for the external
diameters

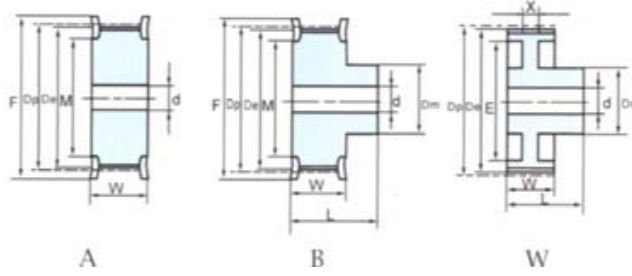

Standard belt width	6mm	9mm	12mm	15mm	20mm	The external diameters	The common differences
L	19	22	25	28	33	<25.4	0.05
W	11	14	17	20	25	25.4-50.8	0.08
						50.8-101.6	0.1
						101.6-177.8	0.13
						177.8-304.8	0.15

Tooth number may be wantonly chosen.Special model would be provided with drawings by

SPCFCTN	SPCFCTN	Z	DP	DE	DM	D	E	F	M	F
10-3M	A	10	9.55	8.79		3		13	6	F-101306
11-3M	A	11	10.5	9.74		3		15	7	F-101507
12-3M	A	12	11.46	10.7		3		15	7	F-101507
14-3M	A	14	13.37	12.61		4		17	9	F-101709
15-3M	A	15	14.32	13.56		4		18	10	F-101810
16-3M	A.B	16	15.28	14.52	10	4		19	11	F-101911
18-3M	A.B	18	17.19	16.43	10	5		23	12	F-102312
19-3M	A.B	19	18.14	17.38	10	5		25	13	F-102513
20-3M	A.B	20	19.1	18.34	10	5		25	14	F-102514
21-3M	A.B	21	20.05	19.29	11	5		25	14	F-102514
22-3M	A.B	22	21.01	20.25	11	6		25	14	F-102514
24-3M	A.B	24	22.91	22.16	14	6		28	18	F-102818
25-3M	A.B	25	23.87	23.11	14	6		28	18	F-102818
26-3M	A.B	26	24.83	24.07	15	6		28	18	F-102818
28-3M	A.B	28	26.74	25.98	17	6		31	20	F-103120
30-3M	A.B	30	28.65	27.89	19	6		33	22	F-103322
32-3M	A.B	32	30.56	29.8	20	6		33	22	F-103322
34-3M	A.B	34	32.47	31.71	22	8		38	26	F-103826
36-3M	A.B	36	34.38	33.62	24	8		38	26	F-103826
38-3M	A.B	38	36.29	35.53	26	8		43	28	F-104328
40-3M	A.B	40	38.2	37.44	28	8		44	32	F-104432
46-3M	A.B	46	43.93	43.16	32	10		51	36	F-105136
48-3M	A.B	48	45.84	45.07	32	10		51	36	F-105136
60-3M	A.B	60	57.3	56.53	36	12		65	50	F-106550