T20 Type synchronous pulley specification model size table

Pitch=20

The table of common differences for the extemal diameters

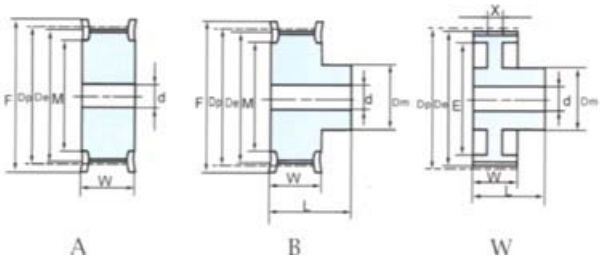

Standard belt width	10mm	16mm	25mm			The external diameters	The common differences
L	33	42	47	57	67	<25.4	0.05
W	21	32	37	47	57	25.4-50.8	0.08
X	8	11	13	15	18	50.8-101.6	0.1
						101.6-177.8	0.13
						177.8-304.8	0.15

Tooth number may be wantonly chosen.Special model would be provided with drawings by consumers.if consumers organizes manufacture according to this co's models,please inform us inner bore and key groove.

SPCFCTN	TYPE	Z	DP	DE	DM	D	E	F	M	F
T10-12	A.B	12	38.2	36.35	25	10		43	28	F-154328
T10-14	A.B	14	44.56	42.7	30	10		47	34	F-154734
T10-15	A.B	15	47.75	45.9	33	10		51	36	F-155136
T10-16	A.B	16	50.93	49.05	35	10		57	41	F-155741
T10-18	A.B	18	57.3	55.45	37	12		61	41	F-156141
T10-20	A.B	20	63.66	61.8	40	12		69	50	F-156950
T10-22	A.B	22	70.03	68.15	40	12		74	53	F-157453
T10-24	A.B	24	76.39	74.55	40	12		83	63	F-158363
T10-25	A.B	25	79.58	77.7	40	12		86	66	F-158666
T10-26	A.B	26	82.76	80.9	45	12		86	66	F-158666
T10-28	A.B	28	89.13	87.25	45	12		93	75	F-159375
T10-30	A.B	30	95.49	93.65	45	12		99	78	F-159978
T10-32	A.B	32	101.86	100	50	14		105	84	F-1510584
T10-36	A.B	36	114.59	112.75	50	14		118	90	F-1511890
T10-40	A.B	40	127.32	125.45	50	14		131	101	15131101
T10-44	W	44	140.06	138.2	55	16	120			
T10-48	W	48	152.79	150.95	55	16	132			
T10-50	W	50	159.15	157.3	60	16	140			
T10-60	W	60	196.99	189.1	60	16	170			